


NOTES:

1. BRAKE BRACKETS USE 7/16-20 BOLT THAT SHOULD BE TORQUE TO 54 FT-LB WHEN USING 12 POINT NUTS. FOR SOME CASES, IF NO NUTS ARE USED BECAUSE BRAKE BRACKETS ARE ALUMINUM AND THREADED REDUCE TORQUE TO 50 FT-LB.
2. TORQUE BALL JOINTS TO MANUFACTURER'S RECOMMENDATIONS.
3. LOCTITE BLUE MAY BE USED IF DESIRED BUT IS NOT NECESSARY IF TORQUE VALUES ARE FOLLOWED.

REV. ↓	LTR	DESCRIPTION	DATE	APPROVED
0		INITIAL RELEASE	01/02/10	FJT

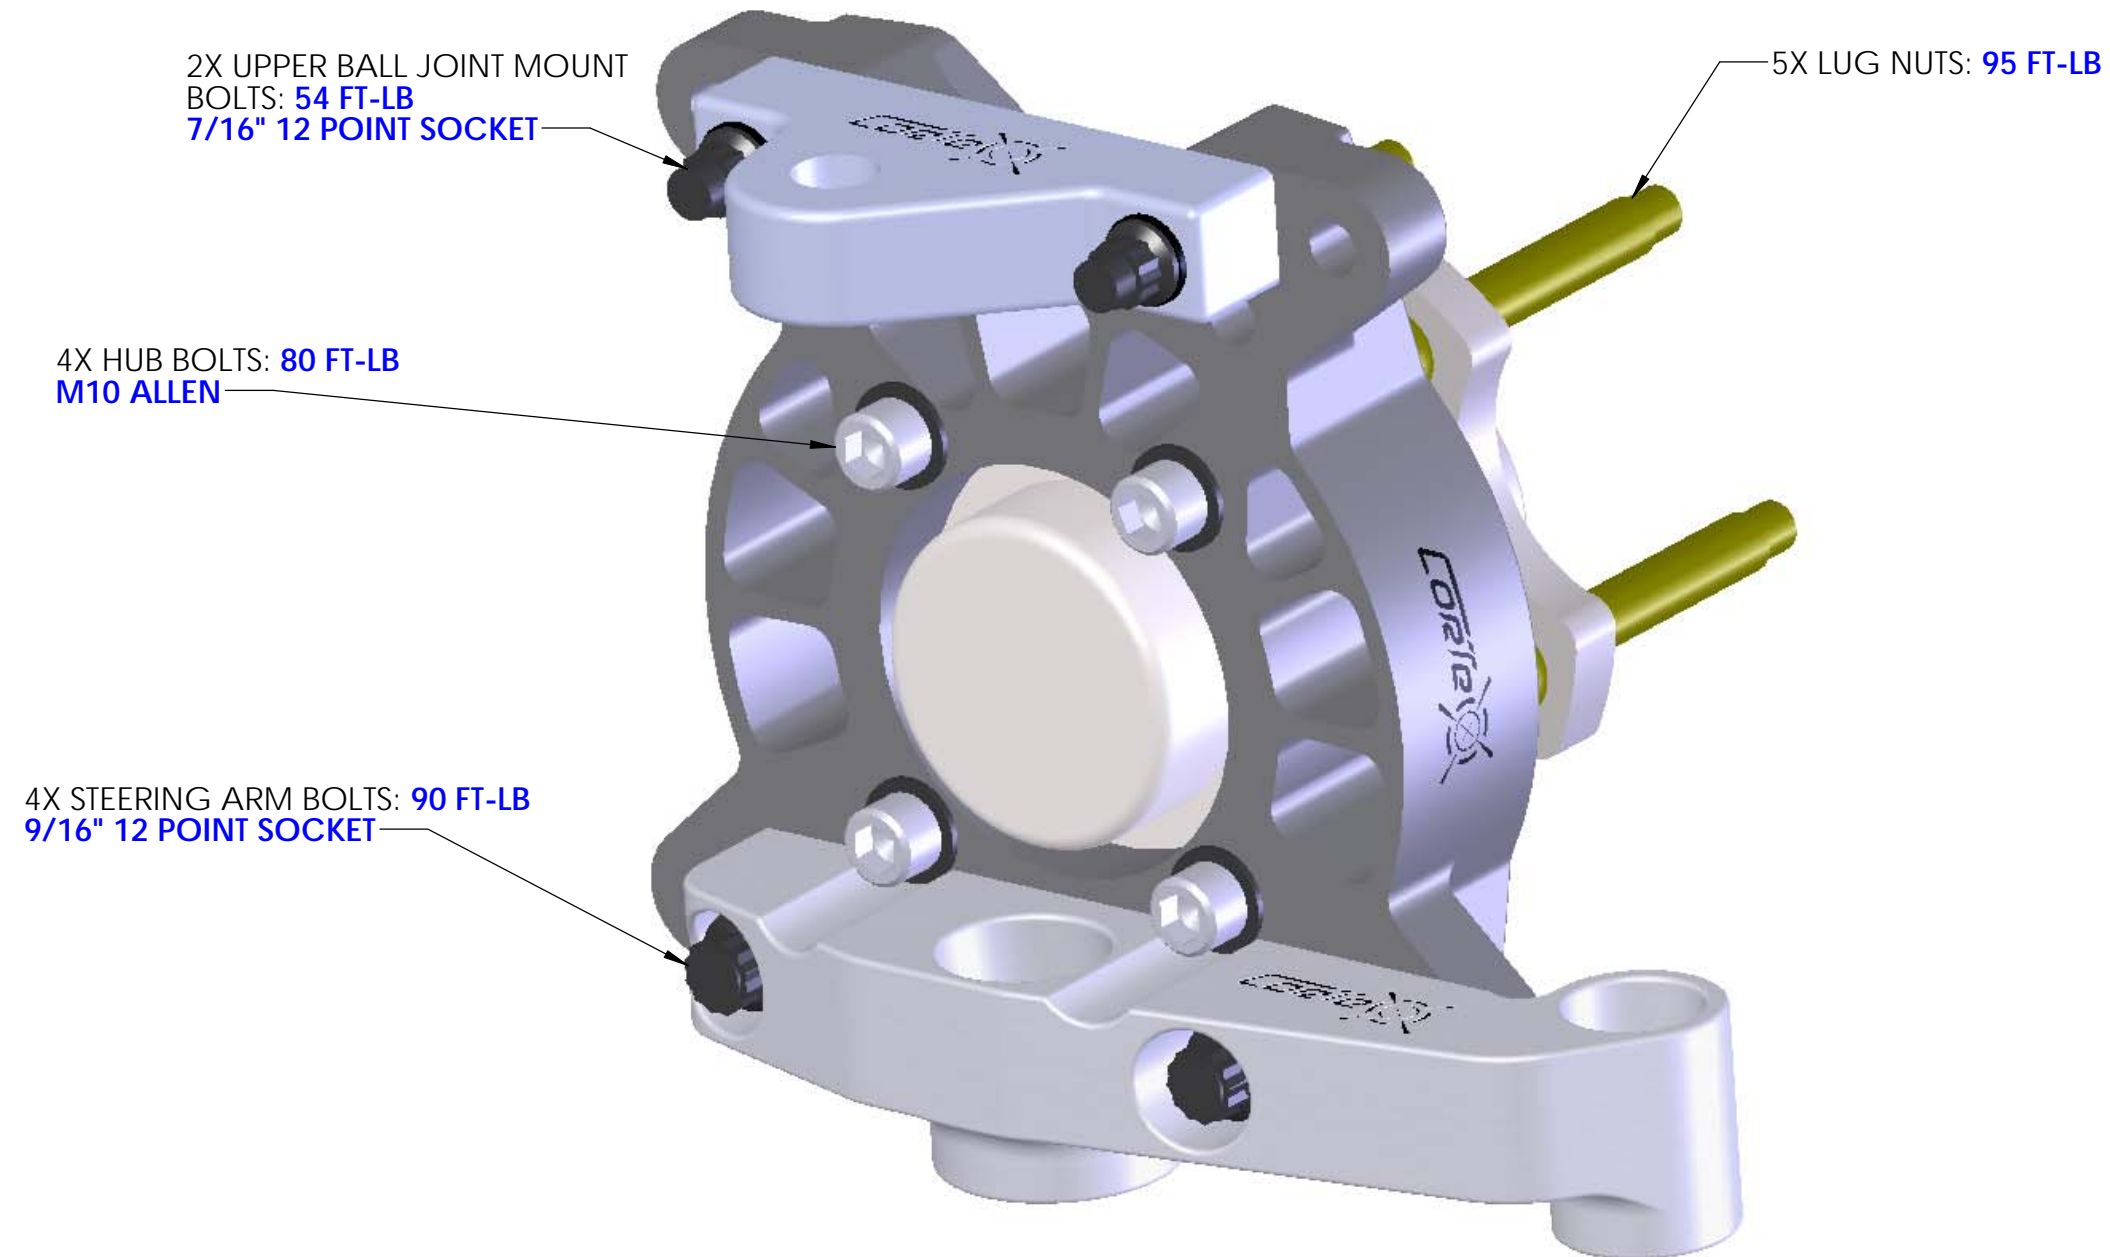

UNLESS OTHERWISE SPECIFIED		RELEASE DATE		CORTEX RACING	
1. DIMENSIONS ARE IN INCHES AND DEGREES.	TOLERANCES	10/15/2010		San Francisco, CA	
3. DRILLED HOLES +.003/- .001	.X ±.1	ENGR.	TROJANEK	Ph: (415) 425-0030 email: filip@cortexracing.com	
4. FILLETS .005 R MAX	.XX ±.01	DRAWN	TROJANEK	TITLE	
5. MACHINED FINISH MAX ()	.XXX ±.005	CHECKED		TORQUE SPECIFICATIONS	
6. DIAMETERS CONCENTRIC WITHIN .003 TIR	ANGLES ±.25°			RADIAL SPINDLE	
7. REMOVE SHARP EDGES .005 MAX R OR CHAMFER	THIRD ANGLE PROJ.			-	
				SIZE	REV. 0
				B	
				SCALE	
				NTS	
				WEIGHT	
					SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CORTEX PRECISION TECHNOLOGY LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION OF CORTEX PRECISION TECHNOLOGY LLC IS PROHIBITED.